




FUNCTIONS IN DETAIL

Important things
you should know
about functions

SCOPE

Variable "visibility"

The location where a variable is defined dictates where we have access to that variable

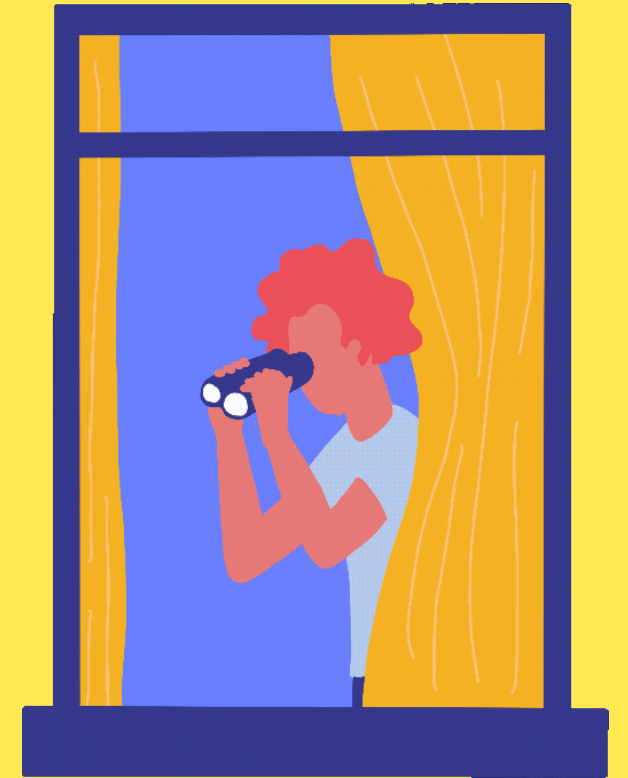

FUNCTION SCOPE

```
function helpMe(){  
    let msg = "I'm on fire!";  
    msg; //"I'm on fire";  
}
```

msg is scoped to the
helpMe function

```
msg; //NOT DEFINED!
```

FUNCTION SCOPE

```
let bird = 'mandarin duck';  
  
function birdWatch(){  
  let bird = 'golden pheasant';  
  bird; //'golden pheasant'  
}  
  
bird; //'mandarin duck'
```

bird is scoped to
birdWatch function

BLOCK SCOPE


```
let radius = 8;  
  
if(radius > 0){  
    const PI = 3.14;  
    let circ = 2 * PI * radius;  
}  
  
console.log(radius); //8  
console.log(PI); //NOT DEFINED  
console.log(circ); //NOT DEFINED
```

PI & *circ* are
scoped to the
BLOCK

LEXICAL SCOPE

```
function outer() {  
  let hero = "Black Panther";  
  
  function inner() {  
    let cryForHelp = `${hero}, please save me!`  
    console.log(cryForHelp);  
  }  
  
  inner();  
}
```

FUNCTION EXPRESSIONS



```
const square = function (num) {  
  return num * num;  
}  
square(7); //49
```

**FUNCTIONS
ARE...
OBJECTS!**



HIGHER ORDER FUNCTIONS



HIGHER ORDER FUNCTIONS

Functions that operate on/with other functions.

They can:

- Accept other functions as arguments
- Return a function

FUNCTIONS AS ARGUMENTS

```
function callTwice(func) {  
  func();  
  func();  
}  
  
function laugh() {  
  console.log("HAHAHAHAHAHAHAHAHAHAHAHA");  
}  
callTwice(laugh) //pass a function as an arg!  
// "HAHAHAHAHAHAHAHAHAHAHAHA"  
// "HAHAHAHAHAHAHAHAHAHAHAHA"
```

RETURNING FUNCTIONS

```
function makeBetweenFunc(min, max) {  
  return function (val) {  
    return val >= min && val <= max;  
  }  
}  
  
const inAgeRange = makeBetweenFunc(18, 100);  
  
inAgeRange(17); //false  
inAgeRange(68); //true
```

METHODS

```
const math = {  
  multiply : function(x, y) {  
    return x * y;  
  },  
  divide   : function(x, y) {  
    return x / y;  
  },  
  square   : function(x) {  
    return x * x;  
  }  
};
```

We can add functions as properties on objects.

We call them methods!

SHORTHAND

```
const math = {  
  blah: 'Hi!',  
  add(x, y) {  
    return x + y;  
  },  
  multiply(x, y) {  
    return x * y;  
  }  
}  
math.add(50, 60) //110
```


We do this so often that there's a new shorthand way of adding methods.

'THIS' IN METHODS

Use the keyword `this` to access other properties on the same object.

```
const person = {  
  first: 'Robert',  
  last: 'Herjavec',  
  fullName() {  
    return `${this.first} ${this.last}`  
  }  
}  
  
person.fullName(); // "Robert Herjavec"  
person.last = "Plant";  
person.fullName(); // "Robert Plant"
```

The value of ***this*** depends on the invocation context of the function it is used in.

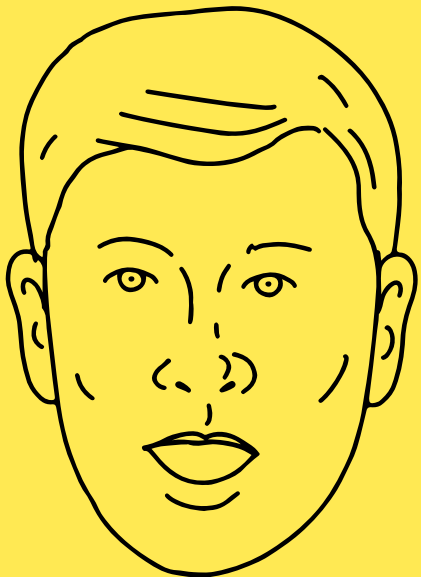

SAME FUNCTION



```
const person = {  
  first: 'Robert',  
  last: 'Herjavec',  
  fullName() {  
    return `${this.first} ${this.last}`  
  }  
}
```



```
person.fullName();  
// "Robert Herjavec"
```

DIFFERENT RESULT???



```
const func = person.fullName;  
func()  
// "undefined undefined"
```

The value of ***this*** depends on
the **invocation context** of
the function it is used in.

